


REV. RECORD  
IssX C/XXXX  
Date XXXXXX

EXAMPLE FOUNDATION (2300-SERIES, 2500-SERIES, 2600-SERIES, ETC):

- (1) EXCAVATE HOLE APPROXIMATELY 50mm DEEPER THAN ROOT DEPTH.
  - (2) LAY PAVING SLABS BELOW EACH PILLAR LEG, ENSURING THEY ARE LEVEL.
  - (3) POSITION PILLAR AS REQUIRED, WITH DUCTING AS APPROPRIATE.
  - (4) BACK FILL WITH 'DRY MIX' CONCRETE TO 50mm BELOW GROUND LEVEL.
  - (5) POSITION PAVING SLABS IN FRONT OF PILLAR IF REQUIRED.
  - (6) MAKE GOOD SURROUNDING AREA WITH TOPSOIL, ETC.
- (THE SAME PRINCIPLE IS USED FOR OTHER SIZES OF PILLAR)

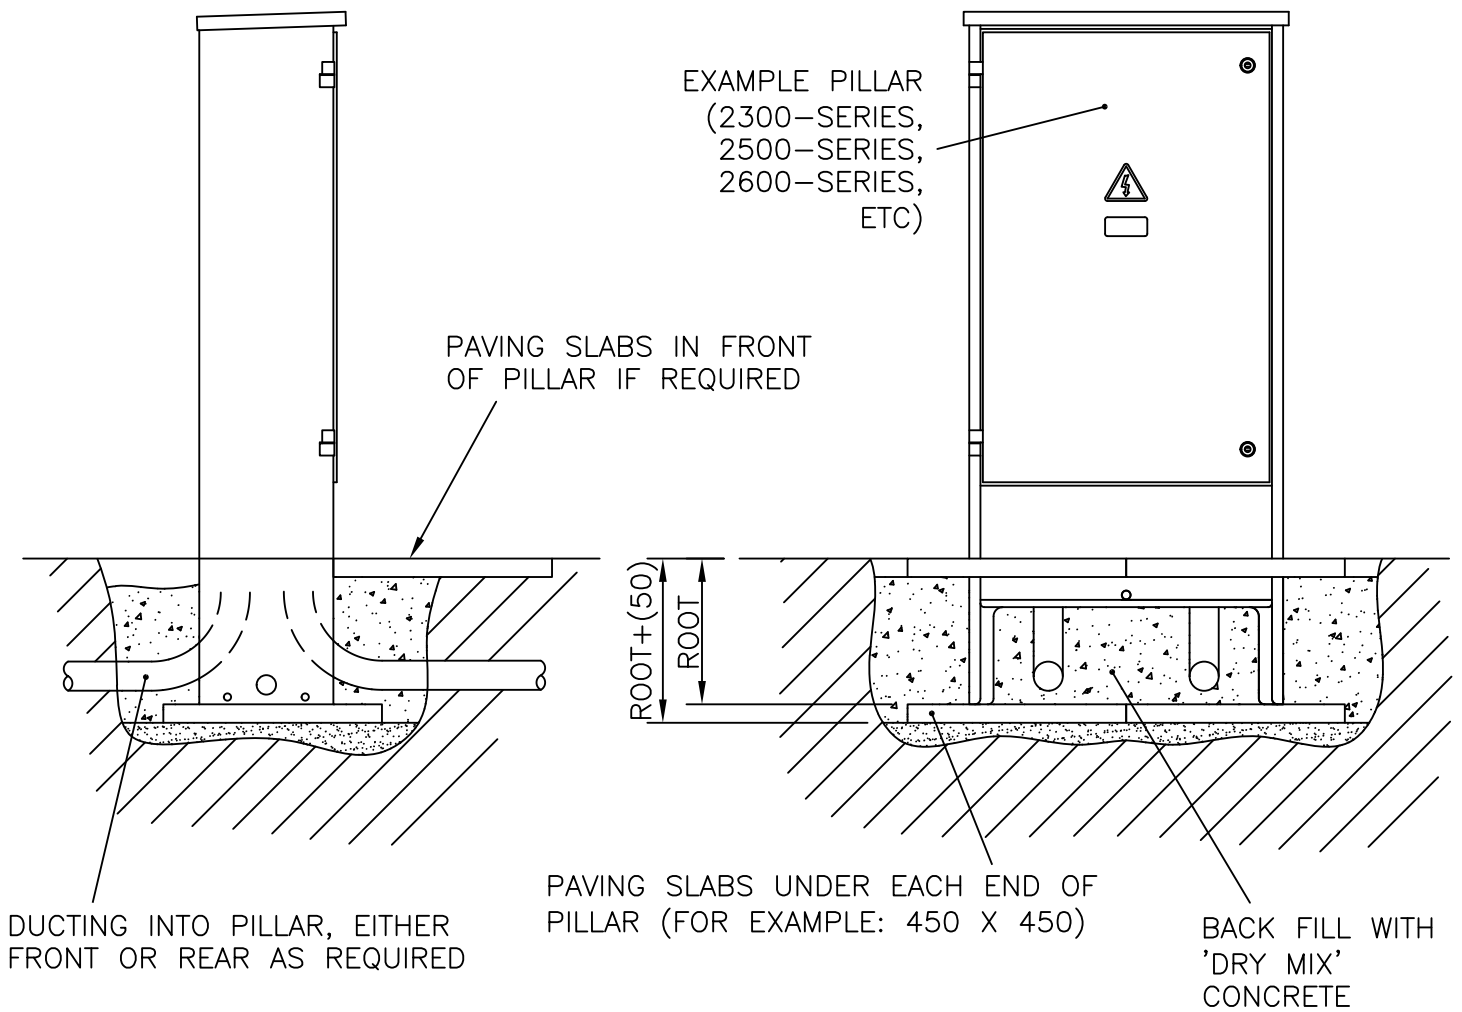

NOTES: (1) ALL DIMENSIONS IN mm. (2) REMOVE ALL BURRS AND SHARP EDGES.

© 2017 PUDSEY DIAMOND ENGINEERING LTD. ALL RIGHTS RESERVED. THIS DOCUMENT OR ANY PART THEREOF MAY NOT BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY WAY WITHOUT WRITTEN PERMISSION FROM PUDSEY DIAMOND ENGINEERING LTD.

|  |  |                              |                         |
|--|--|------------------------------|-------------------------|
| LINEAR TOLERANCES<br>UNLESS OTHERWISE<br>STATED:<br>X.00 = ±0.15mm<br>X.0 = ±0.3mm<br>X = ±1mm | ANGULAR TOLERANCES<br>UNLESS OTHERWISE<br>STATED:<br>X = ±1° | MATERIAL:<br>—<br>SPEC:<br>— |                         |
| DATE:<br>04/10/17  | SCALE:<br>1:16   | FINISH:<br>—                 |                         |
| DRAWN:<br>GT   | CHECKED:<br>IG   |                              | 3RD ANGLE<br>PROJECTION |

